



Manufacturers of on-site maintenance equipment

TRAILERS
VERSATILE • DEPENDABLE • PRACTICAL



10060



10120



10083



10253

Tanks

Sage Oil Vac uses ASME-rated pressure vessels and an air compressor to create vacuum and pressure in the tanks. This vacuum and pressure process evacuates and refills fluids without the use of pumps.

Tank Sizes

Tank sizes range from 60 to 250 gallons. Multiple tank configurations are available.

Hoses

All standard hoses are 3/4" x 25' with spring retractable hose reels. The 11120 and 11184 have standard 50' hose lengths. Longer hose lengths are available.

Trailers

Trailers meet National Association of Trailer Manufacturers' guidelines relating to federal safety standards and regulations and best practices that govern trailer construction.

Used Filter Receptacle™

The Used Filter Receptacle™ provides a convenient manner to drain, store and transport messy, used oil filters from the point of service to the point of disposal. Filters are allowed to hot drain by placing them on pegs that are incorporated into the Used Oil Receptacle™. The accumulated oil can be vacuumed into the used oil tank with the turn of a valve.

Toolbox

A tongue-mounted toolbox provides storage and is standard on all systems except the 10060.

Filter Stinger™

The Filter Stinger™ attaches to the evacuation hose and punctures the oil filter before it is spun off. This patented device evacuates the hot, used oil from oil filters, keeping oily messes to a minimum and decreases burn hazards for technicians.

Barrel Straw

The Barrel Straw attaches to the top of any new product tank and inserts into a 55 gallon drum or bulk tank, allowing the user to quickly vacuum fresh fluids into the tank. It replaces funnels and 5 gallon buckets/jugs, while eliminating possible lifting injuries and spills.

Grease

Brackets for 120# grease drum are available.

Air Compressors

Air compressors are utilized to create vacuum and pressure in the tanks. The air compressor may also be used with an air hose reel for airing up tires or blowing off filters. Gas or diesel air compressors are available.

Disclaimer: Sage Oil Vac reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. © 2010 Sage Oil Vac Inc. All Rights Reserved.

Standard/Optional Equipment





- Standard Equipment**
- 1 Pistol Grip Quart meter
 - 2 Used Filler Receptacle™
 - 3 Filler Stinger™
 - 4 Barrel Straw

Fresh Fluid Filter
NATM Certified Trailer
Tongue Mounted Toolbox (excluding #10060)

- Optional Equipment**
- 5 Enclosed Reel Cabinet
 - 6 120 lb Grease Package (includes reel, pump, control handle)

Preset or Mechanical meters
Heated fresh fluid tanks
8 HP or 13 HP gas engine air compressors
7 HP or 10 HP diesel engine air compressors
Compressor/Generator/Welder Combinations
Trailer Mounted Drain Pan
Universal & Adjustable Coupler
36 ft or 50 ft reels

*Dimensions and weights vary with added optional equipment; consult with Sage Oil Vac representative to determine differences and standard features.
See Lube Trailer Specs below for Model Specific optional and standard features.
Trailers meet National Association of Trailer Manufacturers' guidelines relating to federal safety standards and regulations and best practices that govern trailer construction.

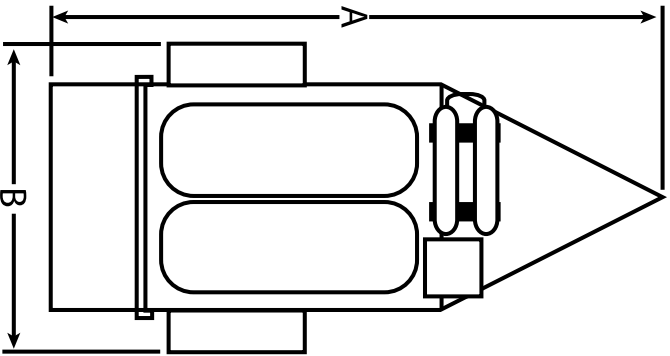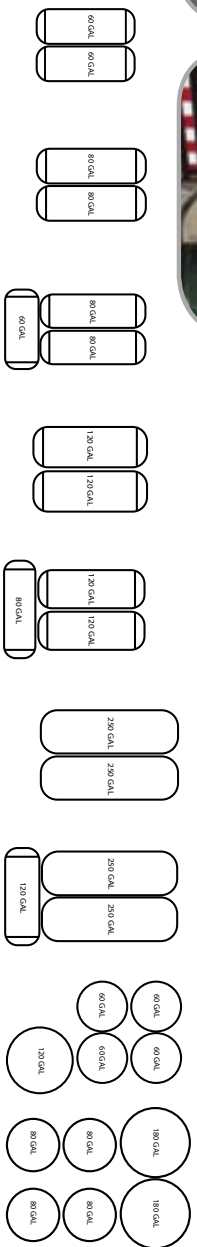

	MODEL #	10060	10080	10083	10120	10123	10250	10253	11120	11186
Tanks gallons / (liters)		TWO 60 / (227)	TWO 80 / (303)	ONE 80 / (227) TWO 80 / (303)	TWO 120 / (454)	ONE 80 / (303) TWO 120 / (454)	TWO 250 / (946)	ONE 120 / (454) TWO 250 / (946)	ONE 120 / (454) FOUR 60 / (227)	TWO 180 / (681) FOUR 80 / (303)
Dimensions ft. / (m)	A	11' / (3.35)	12' 2" / (3.71)	14' / (4.30)	13' 8" / (4.19)	15' 6" / (4.72)	15' 10" / (4.83)	18' / (5.49)	15' 6" / (4.72)	19' 6" / (5.94)
	B	6' / (1.83)	6' / (1.83)	6' / (1.83)	7' / (2.13)	7' / (2.13)	7' / (2.13)	7' / (2.13)	7' / (2.13)	8' / (2.44)
Empty Weight lb. / (kg)		1360 / (617)	1520 / (690)	1820 / (825)	2165 / (982)	2640 / (1198)	2700 / (1225)	3220 / (1460)	3797 / (1722)	5496 / (2493)
Normal Operating Wt. lb. / (kg) ^A		1850 / (839)	2275 / (1032)	2850 / (1293)	3270 / (1483)	4000 / (1814)	4675 / (2121)	5560 / (2522)	5111 / (2318)	7978 / (3619)
Max Weight lb. / (kg) ^B		2200 / (997)	3190 / (1447)	3926 / (1780)	4420 / (2005)	5480 / (2486)	7100 / (3220)	8500 / (3856)	6425 / (2914)	10460 / (4745)
Tire Size		14"	15"	15"	15"	15"	15"	15"	15"	16"
Axles - Qty & Style ^C		1 RT	1 RT	1 RT	1 SL	1 SL	2 SL	2 SL	2 SL	2 SL
Drain Pan Holder		NO	NO	NO	NO	NO	NO	NO	S	S
Drain Pan gallons / (liters)		-	-	-	-	-	-	-	17 / (64)	17 / (64)
Reel Cabinet		0	0	0	0	0	0	0	S	S
Epoxy Line Coolant Tanks		-	-	-	-	-	-	-	(1) 80 gallon	(1) 80 gallon
Coupler ^D		2"	2" - U	2" - U	2" - U	2" - U	2" - U	2" - U	2"	2 5/16" - U
120# Grease Bracket		NO	YES	YES	YES	YES	YES	YES	S	S
Tongue Mounted Toolbox		0	S	S	S	S	S	S	S	S
Compressor	HP	5.5 HP	5.5 HP	5.5 HP	5.5 HP	5.5 HP	5.5 HP	5.5 HP	8HP	8HP
	CFM@40 PSI	12.5	12.5	12.5	12.5	12.5	12.5	12.5	20	20
Air Reel		0	0	0	0	0	0	0	S	S
Spare Tire		0	0	0	0	0	0	0	S	S
Hose Length ft. / (m)		25 / (7.62)	25 / (7.62)	25 / (7.62)	25 / (7.62)	25 / (7.62)	25 / (7.62)	25 / (7.62)	50 / (15.24)	50 / (15.24)

A] Assumes all fluid tanks are half full B] Assumes all fluid tanks are 90% full C] RT=Rubber Torison SL=Spring Leaf D] U=Universal Hitch